



OVERLOAD RELAY 6...25 A FOR MOTOR PROTECTION  
 SIZE S0,  
 CLASS 10 CONTACTOR ASS. MAIN CIRCUIT: SCREW  
 CONN. AUX.CIRCUIT: SCREW CONN. MANUAL-AUTOM.-  
 RESET

General technical data:		
product brand name		SIRIUS
product designation		solid-state overload relay
Size of overload relay		S0
Number of poles / for main current circuit		3
Product function / removable terminal for auxiliary and control circuit		Yes
Impulse voltage resistance / rated value	kV	6
Protection class IP / on the front		IP20
Protection against electrical shock		finger-safe
Installation altitude / at a height over sea level / maximum	m	2,000
Resistance against shock		15g / 11 ms
Ambient temperature		
• during transport	°C	-40 ... +80
• during storage	°C	-40 ... +80
• during operating	°C	-25 ... +60
Relative humidity		
• during operating phase	/ %	95
EMC immunity to interference		
• according to IEC 60947-1		corresponds to degree of severity 3

<b>EMC emitted interference</b> • according to IEC 60947-1		CISPR 11, environment B (residential area)
<b>Electrostatic discharge</b> • according to IEC 61000-4-2		6 kV contact discharge / 8 kV air discharge
<b>Field-bound parasitic coupling</b> • according to IEC 61000-4-3		10 V/m
<b>Conductor-bound parasitic coupling BURST</b> • according to IEC 61000-4-4		2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3
<b>Conductor-bound parasitic coupling conductor-earth SURGE</b> • according to IEC 61000-4-5		2 kV (line to earth) corresponds to degree of severity 3
<b>Conductor-bound parasitic coupling conductor-conductor SURGE</b> • according to IEC 61000-4-5		1 kV (line to line) corresponds to degree of severity 3
<b>Active power loss / total / typical</b>	W	1.2
<b>Size of the contactor / can be combined / company-specific</b>		S0

#### Main circuit:

<b>Operating current / at AC-3 / at 400 V / rated value</b>	A	25
<b>Type of assignment</b>		2

#### Auxiliary circuit:

<b>Number of NC contacts / for auxiliary contacts</b>		1
<b>Number of NO contacts / for auxiliary contacts</b>		1
<b>Number of changeover contacts / for auxiliary contacts</b>		0
<b>Design of the fuse link / for short-circuit protection of the auxiliary switch / required</b>		fuse gL/gG: 6 A
<b>Operating current / of the auxiliary contacts</b> • at AC-15 • at 24 V • at 110 V • at 120 V • at 125 V • at 230 V • at DC-13 • at 24 V • at 60 V • at 110 V • at 125 V • at 220 V	A A A A A A A A A A A	4 4 4 4 3 2 1 0.3 0.3 0.1

**Protection function:**

<b>Trip class</b>		CLASS 10
<b>Adjustable response current</b>		
<ul style="list-style-type: none"> <li>• of the current-dependent overload release</li> </ul>	A	6 ... 25

**Installation/mounting/dimensions:**

<b>Type of mounting</b>		direct mounting
<b>mounting position</b>		any
<b>Depth</b>	mm	84
<b>Height</b>	mm	87
<b>Width</b>	mm	45

**Connections:**

<b>Design of the electrical connection</b>		
<ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for auxiliary and control current circuit</li> </ul>		screw-type terminals screw-type terminals
<b>Type of the connectable conductor cross-section</b>		
<ul style="list-style-type: none"> <li>• for main contacts           <ul style="list-style-type: none"> <li>• finely stranded               <ul style="list-style-type: none"> <li>• with conductor end processing</li> </ul> </li> </ul> </li> <li>• for AWG conductors / for main contacts</li> <li>• for auxiliary contacts           <ul style="list-style-type: none"> <li>• finely stranded               <ul style="list-style-type: none"> <li>• with conductor end processing</li> </ul> </li> </ul> </li> <li>• for AWG conductors / for auxiliary contacts</li> </ul>		1x (1 ... 6 mm <sup>2</sup> ), 2 x (1 ... 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> 1x (16 ... 8), 2x (16 ... 8)  1x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> ), 1x (0.5 ... 2.5 mm <sup>2</sup> ) 1x (20 ... 14), 2x (20 ... 14)

**UL/CSA ratings:**

<b>Contact rating designation / for auxiliary contacts / according to UL</b>		B600 / R300
--	--	-------------

**Certificates/approvals:**

**General Product Approval****EMC****For use in  
hazardous  
locations**

CCC



CSA



GOST



UL



C-TICK



ATEX

**Test Certificates**[Special Test  
Certificate](#)[Type Test  
Certificates/Test  
Report](#)**Shipping Approval**

ABS

BUREAU  
VERITAS

GL





LRS



RMRS

**other**[Declaration of  
Conformity](#)[Environmental  
Confirmations](#)**Further information:****Information- and Downloadcenter (Catalogs, Brochures,...)**<http://www.siemens.com/industrial-controls/catalogs>**Industry Mall (Online ordering system)**<http://www.siemens.com/industrial-controls/mall>**Cax online generator:**<http://www.siemens.com/cax>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<http://support.automation.siemens.com/WWW/view/en/3RB3026-1QB0/all>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RB3026-1QB0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RB3026-1QB0)

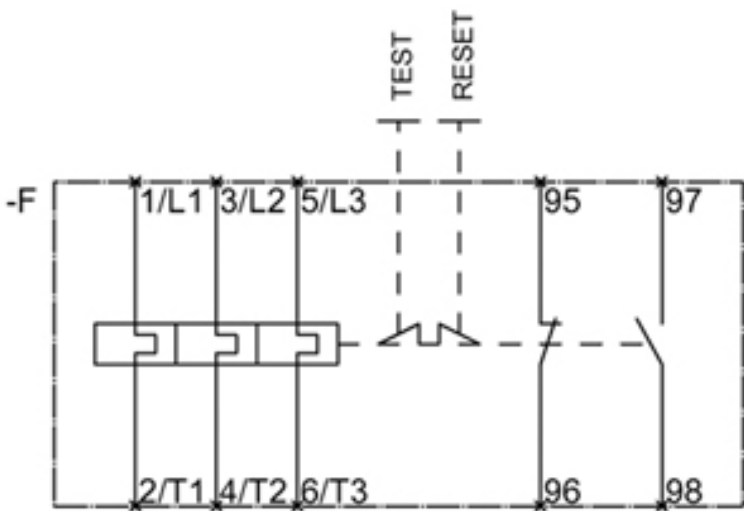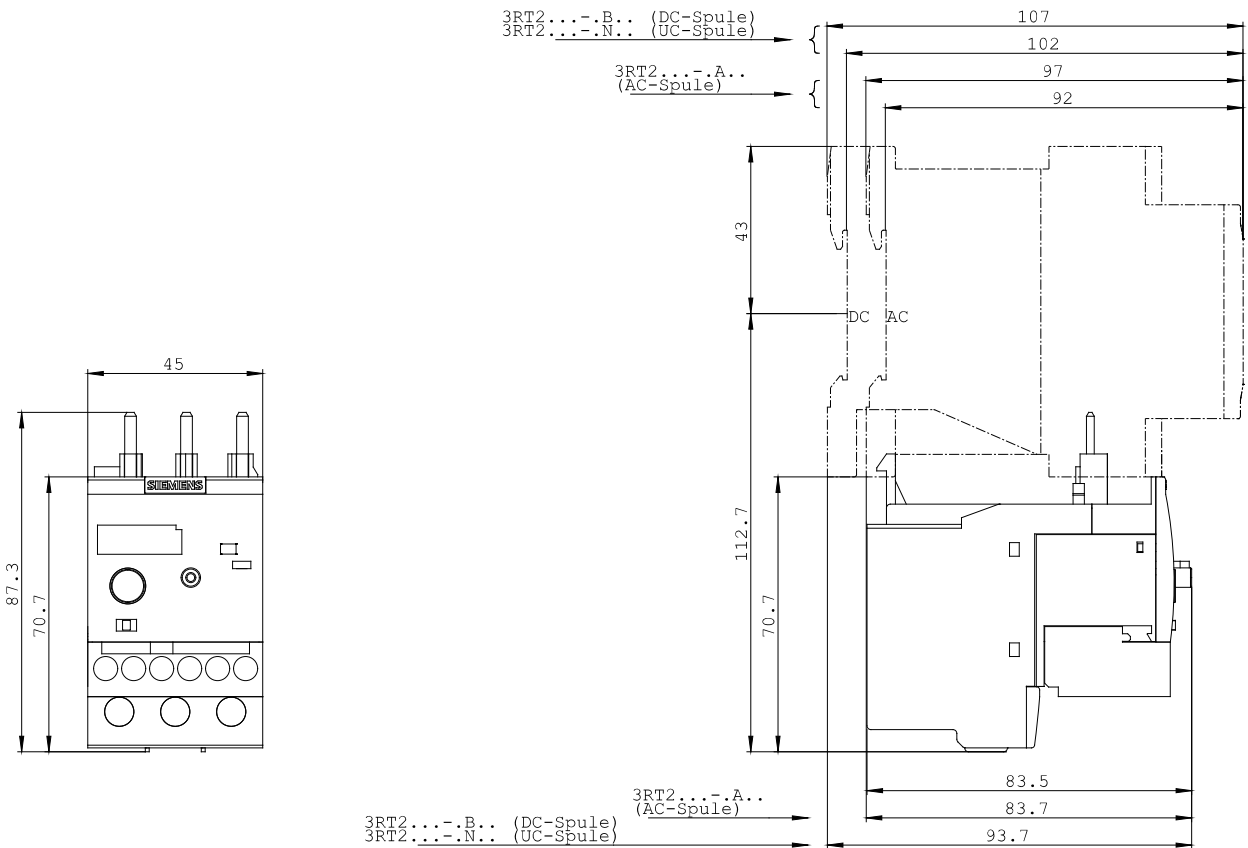

last change:

Oct 28, 2013