


INFORMACIÓN TÉCNICA

| | 16 | 18 | 24 |
|--|---------|---------|--------------|
| Potencia / Power (W) | 1600 | 1800 | 2400 |
| Caudal / Air Flow (M ³ /H) | 190 | 210 | 294 |
| Airwatt (W) | 591 | 643 | 835 |
| Depresión / Water-Lift (MM/H ₂ O) | 3100 | 3300 | 2800 |
| Superficie/ Area (Cm ² HEPA FILTER) | 3000 | 3000 | 3000 |
| Cuba / Container (L) | 20 | 28 | 28 |
| Nivel sonoro / Noise level (DB) | ≤ 60 | ≤ 60 | ≤ 60 |
| Tensión / Voltage (V) | 230 | 230 | 230 |
| Peso (Kg) /Weight (Kg) | 15 | 16 | 17 |
| Tipo de motor / Motor Type | By-pass | By-pass | Through-flow |
| Nº de motores / No. of motors | 1 | 1 | 2 |

DIMENSIONES DIMENSIONS

| | 16 | 18 | 24 |
|---|-----|-----|-----|
| A | 825 | 925 | 925 |
| B | 340 | 440 | 440 |
| C | 510 | 610 | 610 |
| D | 395 | 395 | 395 |
| E | 520 | 620 | 620 |
| F | 680 | 780 | 710 |
| G | - | - | 780 |

*(mm)

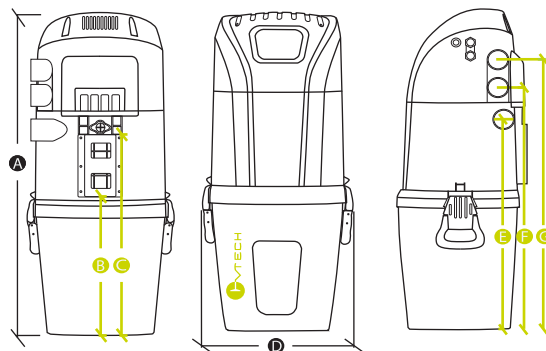

RECOMENDACIONES DE INSTALACIÓN RECOMMENDATIONS FOR INSTALLATION

| | 16 | 18 | 24 |
|---|-------|-------|-------|
| Nº de tomas Inlet valves | 8 | 12 | 20 |
| Toma más lejana (ML) Furthest inlet valve (LM) | 30 | 50 | 60 |
| M ² por vivienda M ² house | ≤ 350 | ≤ 500 | ≤ 900 |